



eBox-3300MX Series

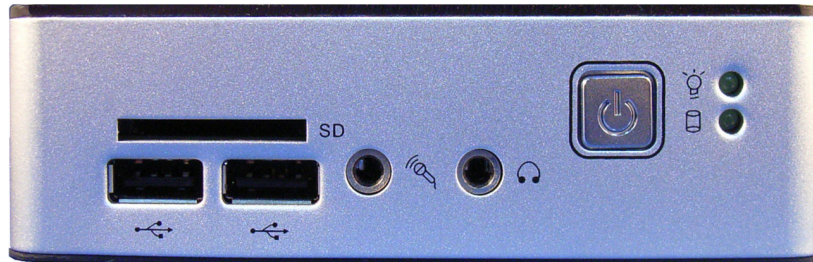

eBox-3300MX

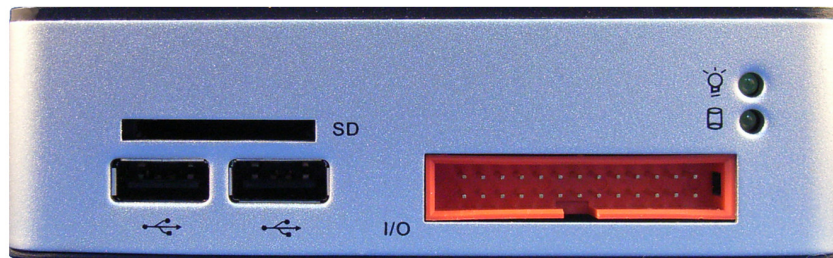

eBox-3300MX-JSK

Specification:

- VESA mounting hole support
- MSTI PMX-1000
- Onboard 512 MB DDR2
- SD boot
- 3 X USB V2.0 port (2 in front)
- 10/100Mbps LAN
- Audio
- PXE diskless boot
- 3 x RS-232 (optional)
- 1 x RS-422 (optional)
- 1 x RS-485 (optional)
- 24 bit GPIO (optional)
- Mini PCI socket (optional)
- Wireless LAN (optional)
- 2.5" SATA Hard Disk installation support (option)
- Ultra Low Power

Model Name	3300MX	3300MX-M	3300MX-H	3300MX-C	3300MX-C22	3300MX-C85	3300MX-T	3300MX-TM	3300MX-TH	3300MX-TC	
Processor	MSTI PMX-1000 (1GHz)										
Memory	Onboard 512MB DDR2										
VGA	Integrated Graphics Chip / D-Sub 15-pin					Integrated Graphics Chip / RCA Jack					
Ethernet	10/100 Mbps LAN (RJ-45 connector) Built-in PXE diskless boot function										
USB	External : 3 ports (2 in the front) Internal : 1 port (reserve for USB Dongle)										
Audio	Mic in and Line out										
GPIO	N/A										
MIO	SD Slot	1X									
	SATA**	1x	N/A	1x	N/A	N/A	N/A	1x	N/A	1x	N/A
	PS2	PS/2 for Keyboard/Mouse x 1									

Serial	RS-232	3x	N/A	N/A	3x	2x	2x	3x	N/A	N/A	3x
	RS-422		N/A	N/A		1x			N/A	N/A	
	RS-485		N/A	N/A			1x		N/A	N/A	
Power	DC +8V ~ +15V										
Dimensions	115 x 115 x 35 mm										
Weight	500g										
Operation Temp.	5 ~ 50 °C										
Model Name	3300MX-G	3300MX-GC22	3300MX-GC85	3300MX-JSK							
Processor	MSTI PMX-1000 (1GHz)										
Memory	Onboard 512MB DDR2										
VGA	Integrated Graphics Chip / D-Sub 15-pin										
Ethernet	10/100 Mbps LAN (RJ-45 connector) Built-in PXE diskless boot function										
USB	External : 3 ports (2 in the front) Internal : 1 port (reserve for USB Dongle)										
Audio	N/A										
GPIO	24-bit GPIO										
MIO	SD Slot	1X									
	SATA**	N/A	N/A	N/A	1x						
	PS2	PS/2 for Keyboard/Mouse x 1									
Serial	RS-232	N/A	2x	2x	3x						
	RS-422	N/A	1x								
	RS-485	N/A		1x							
Power	DC +8V ~ +15V										
Dimensions	115 x 115 x 35 mm										
Weight	500g										
Operation Temp.	5 ~ 50 °C										

Ordering Information:

eBox-3300MX: Standard Version with SATA and 3 x RS-232 ports

eBox-3300MX-M: Standard Version

eBox-3300MX-H: Standard Version with SATA support

eBox-3300MX-C: Standard Version with 3 x RS-232 ports

eBox-3300MX-C22: Standard Version with 2 x RS-232 ports, and 1x RS-422 port

eBox-3300MX-C85: Standard Version with 2 x RS-232 ports, and 1x RS-485 port

eBox-3300MX-G: GPIO Version

eBox-3300MX-GC22: GPIO Version with 2 x RS-232, and 1 x RS-422 port

eBox-3300MX-GC85: GPIO Version with 2 x RS-232, and 1 x RS-485 port

eBox-3300MX-JSK: GPIO Version with 3 x RS-232 ports

eBox-3300MXT: Standard Version with SATA , TV-Out, and 3 x RS-232 ports

eBox-3300MX-TM: Standard Version with TV-Out

eBox-3300MX-TH: Standard Version with SATA support, and TV-Out

eBox-3300MX-TC: Standard Version with 3 x RS-232 ports, and TV-Out