

MXE-210/MXE-210i Series

Intel Atom® Processor E3900 Family-Based Ultra Compact Embedded Platform

Features

- Equipped with Intel Atom® x7-E3950/x5-E3930 processors
- Compact fanless design: 140(W) x 110(D) x 58(H) mm
- Rich I/O & expansion:
 - 1x DisplayPort, 2x USB 2.0, 2x USB 3.0, 2x GbE ports, 2x COM ports (RS-232/422/485)
 - 2x mPCIe slots, 1x USIM slot, 1 x mSATA, 1x Micro SD slot
- Optional
 - 1 x 2.5" SATA SSD by storage kit
 - eSIM support (by project)
- Built-in ADLINK SEMA management solution



Introduction

ADLINK's new Matrix MXE-210 series of ultra compact embedded platforms, based on the Intel Atom® x5-E3930/x7-E3950 Processor, delivers optimum I/O design for maximum connectivity. A full aluminum alloy enclosure with industry-class construction makes the MXE-210 series the embedded system of choice for industrial automation and applications demanding reliability in harsh environments.

With two GbE LAN ports, two COM ports, two USB 2.0 and two USB 3.0 host ports, and dual mPCIe slots and USIM socket support communication with connections via Wi-Fi, BT, 3G, LoRa(SX1276), and 4G LTE, the MXE-210 series enables seamless interconnection, ensuring interoperability between systems. Matrix's proven rugged construction assures operation in harsh environments with operating shock tolerance up to 100 G and extended operating temperatures of -40°C to 85°C(*) available.

The MXE-210 series presents an intelligent, robust embedded system supporting wide application development and easy service deployment, for outstanding performance in Intelligent Transportation, Facility Management, Industrial Automation, and Internet of Things (IoT) applications.



DIN Rail support



Wall Mounting support
(Optional)

Software Support



- Windows® 10 IoT Enterprise 64Bit
- Ubuntu Linux 16.04 LTS 64Bit
- Wind River® Pulsar™ Linux LTS 17

Ordering Information

- **MXE-211/M2G**
Intel Atom® x7-E3950, Quad Core, 2GB DDR3L
- **MXE-212/M2G**
Intel Atom® x5-E3930, Dual Core, 2GB DDR3L
- **MXE-211-ET/M2G**
Intel Atom® x7-E3950, Quad Core, 2GB DDR3L(-20°C to 70°C)
- **MXE-212-ET/M2G**
Intel Atom® x5-E3930, Dual Core, 2GB DDR3L(-20°C to 70°C)
- **MXE-212-WT/M2G**
Intel Atom® x5-E3930, Dual Core, 2GB DDR3L(-40°C to 85°C)
- **MXE-211-S/M2G | MXE-212-S/M2G**
Intel Atom® x7-E3950/x5-E3930, 2GB DDR3L, 2.5" SATA

Optional Accessories

- **4/8 GB DDR3L Upgrade**
Upgrade to 4/8 GB DDR3L memory
- **16/32/64 GB mSATA SSD Option**
Factory-installed 16/32/64 GB MLC industrial grade mSATA SSD
- **32/64/128 GB 2.5" SATA SSD Option**
Factory-installed 32/64/128 GB MLC industrial grade SATA SSD
- **Wireless Kit options**
WiFi/BT/3G/4G LTE/LoRa wireless kit (w/ Antenna)
- **40W AC Adapter**
40W industrial grade AC-DC adapter(-20°C to 70°C)(-4°F to 158°F)

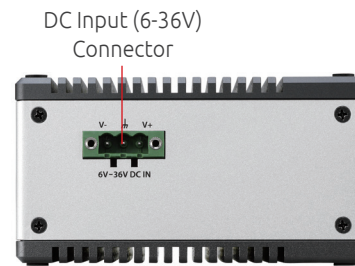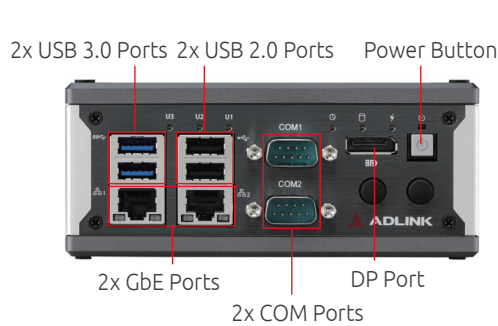

Model Name	MXE-211	MXE-212	MXE-212i (*)
System Core			
Processor	Quad-core Intel Atom® x7-E3950 processor	Dual-core Intel Atom® x5-E3930 processor	
Video	1x DisplayPort 1.2 (Support DP++)		
Memory	DDR3L 1600 1x SODIMM 2 GB (Up to 8G)		
I/O Interface			
Ethernet	2x Intel® GbE LAN		
Serial Port	2x COM (RS-232/422/485, BIOS Selectable)		
USB	2x USB 2.0 + 2x USB 3.0		
Audio	Audio, Mic-in, Line-out (Optional)		
Expansion			
Mini PCIe	2 x Full-size Mini PCIe slots		
USIM	1x USIM slot for 3G/4G LTE communication		
Manageability			
WDT	Watch Dog Timer support by SEMA		
SEMA	SEMA 3.5 support with BMC		
Power Supply			
DC Input	6-36 V _{DC}		
AC Input	40 W AC-DC power adaptor (Optional)		
Storage Device			
mSATA	1x full-size Mini PCIe slot		
SATA III	1 x 2.5" SATA by storage kit (Optional)		
Micro SD	1x Micro SD card slot (Up to 32 GB)		
OS Preload	-		Wind River® Pulsar™ Linux
Mechanical			
Dimensions	140 (W) x 110 (D) x 58 (H) mm (5.5" x 4.3" x 2.3")		
Weight	0.95 Kg (2.06 lbs)		
Construction	Full aluminum alloy construction		
Mounting	DIN rail (Standard) / Wall mounting kit (Optional)		
Other			
Device-Level Security	Trusted Platform Module (TPM) 2.0, Intel Boot Guard, UEFI Secure Boot		
Environmental			
Operating Temperature	<ul style="list-style-type: none"> Standard temperature: 0°C to 50°C (32°F to 122°F) Extended temperature (Optional): -20°C to 70°C (-4°F to 158°F) w/ industrial mSATA/SATA SSD 	<ul style="list-style-type: none"> Standard temperature: 0°C to 50°C (32°F to 122°F) Extended temperature (Optional): -20°C to 70°C (-4°F to 158°F) w/ industrial mSATA/SATA SSD Wide temperature (Optional): -40°C to 85°C (-40°F to 185°F) w/ industrial mSATA/SATA SSD 	
Storage Temperature	-40°C to 85°C (-40°F to 185°F)		
Humidity	approx. 95% @ 40°C (Non-condensing)		
Vibration	Operating: 5 Grms, 5-500 Hz, 3 axes w/ mSATA SSD		
ESD	Contact +/-4 KV, Air +/-8 KV		
Shock	Operating: 100 G, half sine 11 ms duration w/ mSATA SSD		
EMC	CE & FCC Class B (EN61000-6-4/EN61000-6-2) / EN 50155 EMC Compliance		
Safety	UL, CB		

* MXE-212i will be released by Q3 2018.