

Linux-based Arm9 Programmable Automation Controller

PAC-5070



Features

- Linux kernel 2.6.14 OS with file system
- 64MB SDRAM and 16MB NOR Flash
- 4 x 16-bit high-precision multiplexed analog inputs
- 8 x 2500Vrms opto-isolated digital inputs
- 8 x 500mA High-Drive digital outputs
- 2 x 10/100Mbps Ethernet ports
- 1 x RS-232 port, 1 x RS-485 port
- 2 x USB 2.0 host ports for add-on functionality expansion
- 1 x SD memory card slot included for storage expansion
- GNU C / C++ toolchain for Linux / Windows environment
- 9~40VDC input range

■ H/W Specifications

CPU / Memory

- CPU: ATMECL Arm9 AT91RM9200 180MHz w/MMU
- Memory: 64MB SDRAM, 16MB NOR Flash

Network Interface

- Type: 2 x 10/100BaseT, RJ45 connector

USB Ports

- Host Ports: 2, USB 2.0 compliant, with 10-pin header
- Data Rate: Up to 12Mbps

Mass Storage

- 1 x Micro-SD socket (at bottom side)
- SD 2.0 Compliant, support SDHC

TTY (Serial) Ports

- RS-485: One port, with screw-fixed wiring terminal
- Signals: Data+, Data-, GND
- RS-232: One port, with 10-pin header
- Signals: Tx, Rx, RTS, CTS, DSR, DTR, DCD, GND
- Console: One port, with 10-pin header
- Signals: Tx, Rx, GND

TTY (Serial) Port Parameters

- Parity: None, Even, Odd, Mark, Space
- Data Bits: 5, 6, 7, 8
- Stop Bits: 1, 1.5, 2
- Flow Control: RTS / CTS, XON / XOFF, None

High Drive Digital Output

- No. of Channels: 8
- Source Driver: UDN2981A (Allegro MicroSystems)
- Source Voltage (VDD): 5~50VDC
- Output Current: 500mA max.

General


- Watchdog Timer: Yes, for kernel use
- Real-Time Clock (RTC): Yes
- Buzzer: Yes
- Power Input: +9V~+40VDC
- Power Consumption: 12VDC@800mA
- Dimensions (W x H x D): 160 x 104 x 32mm (6.3x4.13x1.26in)
- Operating Temperature: 0~70°C (32~158°F)
- Regulation: CE Class A, FCC Class A

High-precision Analog Input

- A/D Converter: AD7712 (Analog Devices)
- No. of Channels: 4, multiplexed, differential
- Sampling Speed: 10 readings per second
- Input Range (selected by software):
0~150mV, 0~500mV, +/-150mV, +/-500mV
0~1V, 0~5V, 0~10V, +/-1V, +/-5V, +/-10V
0~20mA
- Resolution: 16-bit
- Accuracy: +/-0.1%
- Voltage Input Mode: Differential, 100db CMR
- Voltage Input Impedance: 20M Ohms
- Current Input Impedance: 120 Ohms
- Isolation Protection: 1500VDC

Isolated Digital Input

- No. of Channels: 8
Logical High: 5~24VDC
Logical Low: 0~1.5VDC
Input Resistance: 1.2K ohms@0.5W
- Response Time: 20µs
- Opto-isolation: 2500Vrms

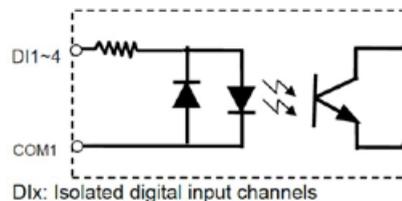

Linux-based Arm9 Programmable Automation Controller

PAC-5070

■ S/W Specifications

General

- OS: Linux, kernel 2.6.14
- Boot Loader: U-Boot
- File Systems: JFFS2, ETX2 / ETX3, VFAT / FAT, NFS

Protocol Stacks

- IPv4, ICMP, ARP, DHCP, NTP, TCP, UDP, FTP, TELNET, HTTP, PPP, PPPoE, CHAP, PAP, SMTP, SNMP V1 / V2, SSL, SSH 1.0 / 2.0

Pre-installed Utilities

- bash: shell command
- tinylogin: login and user manager utility
- telnet: telnet client program
- busybox: Linux utility collection
- ftp: ftp client program

Daemons

- pppd: dial in / out over serial port and PPPoE
- snmpd: SNMP agent program
- telnetd: telnet server program
- inetd: TCP server program
- ftpd: ftp server program
- boa: web server program
- sshd: secured shell server
- iptables: firewall service manager
- amgrd: Artila manager daemon

Toolchain for Linux

- GCC: C / C++ PC cross compiler for Linux, Cygwin
- GLIBC: POSIX Library



Device Drivers

- SD / MMC, UART, Real Time Clock, Buzzer, Digital I/O, Ethernet, Watchdog Timer

USB Host Drivers (Could Be Customized)

- Flash disk
- WiFi (IEEE-802.11)
- RS-232 adapters

■ Layout

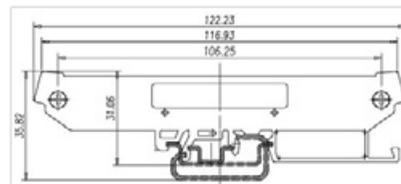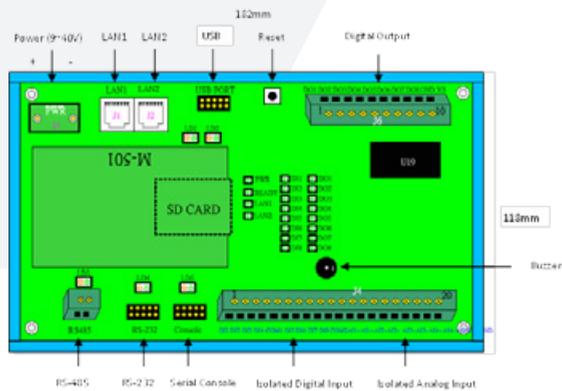

■ Ordering Information

PAC-5070

- Linux-based Arm9 Programmable Automation Controller

CB-F10M9-20 (91-0P9M9-001)

- Console Cable (10Pin Header to DB9 Male, 20cm)



Authorized Distributor

wdsystems.com

sales@wdsystems.com

800-548-2319

919-545-2500

220 Chatham Business Drive
Pittsboro, NC 27312