


Multi-Function & Cost Effective Touch Panel PC

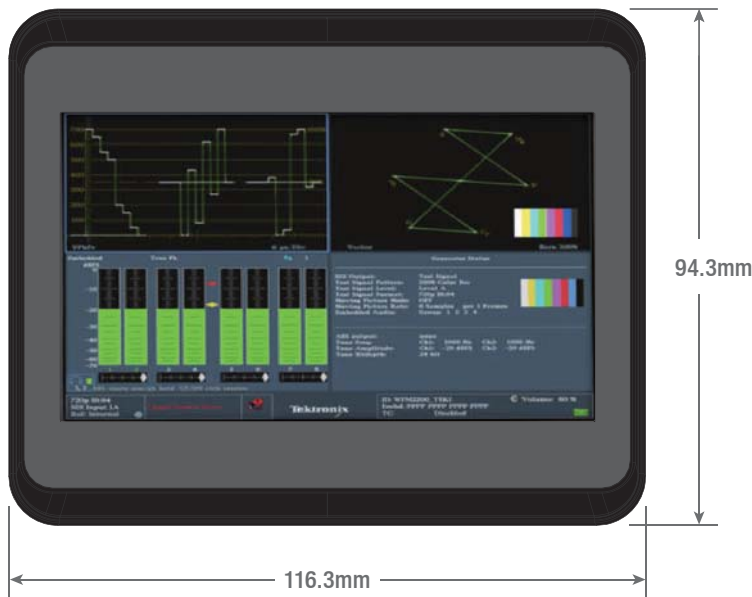

4.3" Panel PC

FEATURES

- 4.3" TFT LCD with Resistive Touchscreen
- DMP Processor 400MHz Onboard
- 128MB / 256MB System Memory Onboard
- SD Slot / Flash Memory Onboard
- IEEE 802.3AT Power Over Ethernet (PoE) Compliant
- IP65 Compliant Front Panel



SPECIFICATION

MODEL	PPC-043T	
	Type	WQVGA TFT LCD
	Size	4.3"
	Resolution (Pixel)	480x272
LCD	Colors	16.7M
Display	View Angle	Vertical 120°, Horizontal 140°
	Brightness	300 cd/m ²
	Backlight life	20,000 hrs
	Contrast Ratio	500:1
CPU	DMP Vortex86EXm 400MHz	
Cache	L1: 16KB I-Cache, 16KB D-Cache L2: 4-way, 128KB L2 Cache	
Memory	128MB / 256MB DDRII Onboard	
Serial Port	RS-232/485/CAN BUS x 1	
USB Ports	USB ports (Ver2.0) x 1	
Ethernet	RJ45 10/100Mbps Ethernet, support IEEE 802.3AT, PoE/PD	
Internal Drives	SD Slot / Flash Memory Onboard (Optional)	
Touch Screen Type	Analog Resistive	
Expansion Slot	Wi-Fi Optional	
Power Requirement	+5VDC	
Operating Temperature	+0°C ~ +50°C (+32°F ~ +122°F) / -20°C ~ +60°C (-4°F ~ +140°F)	
Storage Temperature	-30°C ~ +70°C (-22°F ~ +158°F)	
Operating Humidity	0% ~ 90% Relative Humidity, Non-Condensing	
Operating System	DOS, Linux, Windows CE	
Dimensions	W 116.4 x H 94.4 x D 34.3 mm (W 4.58 x H 3.71 x D 1.35 inches)	
Weight	300g	
Certificate	CE, FCC, VCCI, Vibration, IP65 (Front Panel)	

